


RVEN-50 : 7/8 Lobe 2.6 Stage

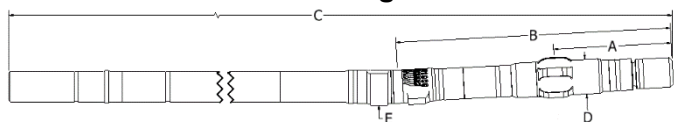

Dimensions

Bit to Stabilizer Center	A	11.1 in
Bit to Bend, ABH	B	52 in
Bit to Bend, Fixed	B	53 in
Bit to Top Sub	C	338 in
Body OD, Slick	D	5.0 in
Body OD, Stabilizer	D	5.7 in
Pad Radius, Fixed & ABH	E	2.75 in
3-1/2 REG Box		
3-1/2 IF Pin		
XT39		
NC35		
3-1/2 IF Box		
4 FH Box		
3-1/2 IF		

Recommended Operating Limits

Max WOB	46,000 lbf
Max Overpull, Backream	67,000 lbf
Max Overpull, Re-Run	137,000 lbf
Max Overpull, POOH	331,000 lbf

Performance Details

HP

Max Diff Pressure	620 psi
Max Torque	5,770 lbf-ft
Stall Torque	9,090 lbf-ft
Rotation	0.260 rev/gal
Flow Range	150-300 gpm
Speed Range	40-80 rpm

Predicted Build Rates (Adj.) – Degrees/100ft

Bend Setting	Slick Hole Size			Stabilized Hole Size		
	Deg	6	6 1/4	6 3/4	6	6 1/4
0.39		1.4	-	-	1.6	1.7
0.78		4.1	3.3	1.6	4.1	4.1
1.15		6.7	5.9	4.2	6.7	6.3
1.50		9.1	8.3	6.6	9.1	8.4
1.83		11.4	10.6	8.9	11.4	10.6
2.12		13.4	12.6	10.9	13.4	12.6
2.38*		15.2	14.4	12.7	15.2	14.4
2.60*		16.7	15.9	14.3	16.7	15.9
2.77*		17.9	17.1	15.4	17.9	17.1
2.90*		18.8	18.0	16.3	18.8	18.0
2.97*		19.3	18.5	16.8	19.3	18.5
3.00*		19.5	18.7	17.0	19.5	18.7


*Bend Setting not recommended for Rotary Drilling

Predicted Build Rates (Fixed) – Degrees/100ft

Bend Setting	Slick Hole Size			Stabilized Hole Size		
	Deg	6	6 1/4	6 3/4	6	6 1/4
0.78		4.1	3.3	1.7	4.1	4.1
1.15		6.7	5.9	4.3	6.7	6.3
1.50		9.1	8.3	6.7	9.1	8.4
1.75		10.9	10.1	8.4	10.9	10.1
1.83		11.4	10.6	9.0	11.4	10.6
2.00		12.6	11.8	10.2	12.6	11.8
2.12		13.4	12.6	11.0	13.4	12.6
2.25*		14.3	13.5	11.9	14.3	13.5
2.38*		15.2	14.4	12.8	15.2	14.4
2.50*		16.1	15.3	13.6	16.1	15.3

*Bend Setting not recommended for Rotary Drilling

Theoretical Performance Curve

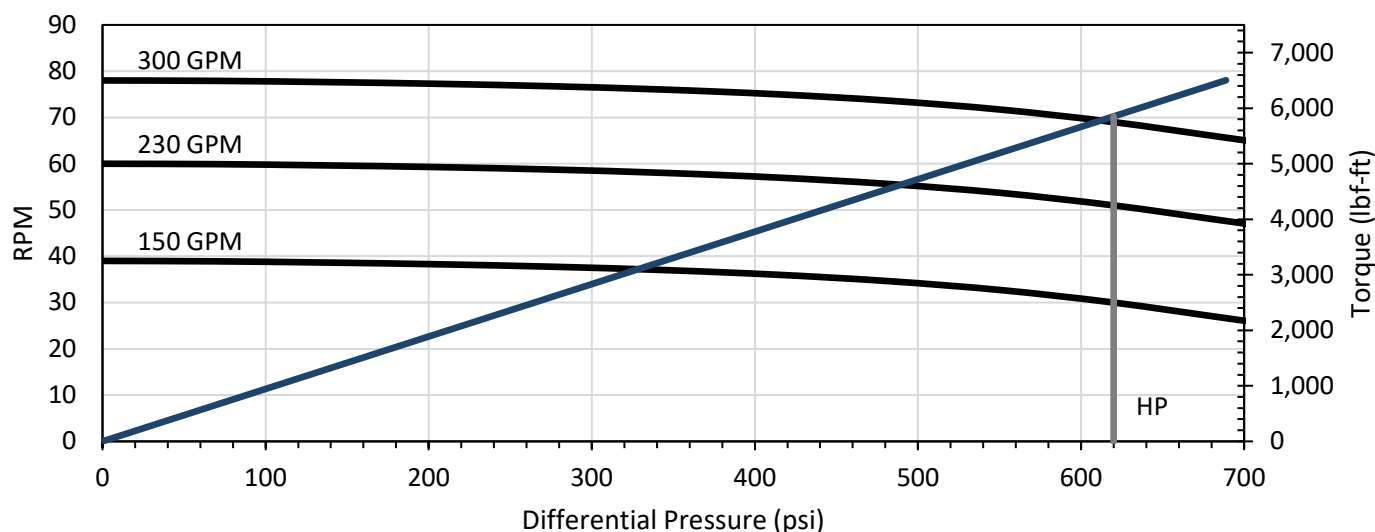

Performance curves based on testing at 70°F. Actual field performance may vary with field operation conditions.